

Wall mounted luminaire

Circular IP65 bulkhead with optional trim accessories. Direct replacement for 1x16W 2D. More than 40% energy savings compared with luminaires with CFL lamps. Frosted diffuser ensuring homogeneous light effect and visual comfort. Sealed to IP65 for protected exterior applications. Robust construction tested up to IK08 impact resistance. 3 hour emergency lighting.


Body: Polycarbonate, black (RAL 9011)

Diffuser: Polycarbonate, opal

Weight: 0.92 kg



TE_LARA_F_250_BLANK_BL_persp.jpg

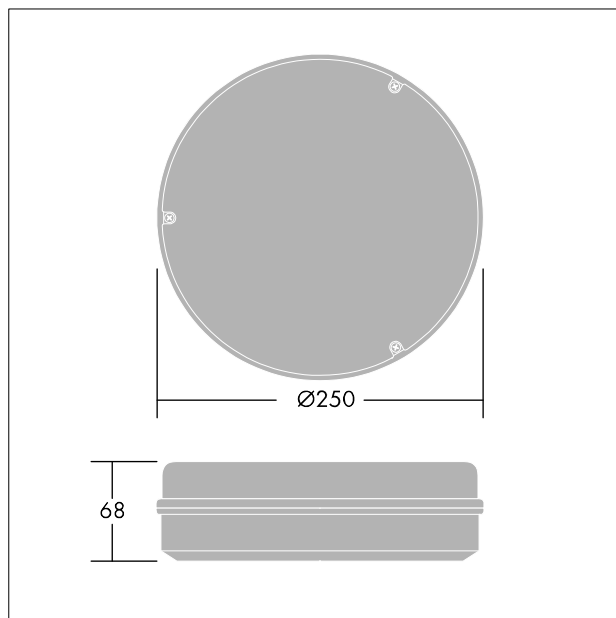

TE_LARA_M_800L.wmf

Light Distribution

Emergency

This product contains a light source of energy efficiency class D.