

Wall mounted luminaire

Circular IP65 bulkhead with optional trim accessories. Direct replacement for 1x28W 2D. More than 70% energy savings compared with luminaires with CFL lamps. Frosted diffuser ensuring homogeneous light effect and visual comfort. Sealed to IP65 for protected exterior applications. Robust construction tested up to IK08 impact resistance. Integrated microwave presence sensor. 3 hour emergency lighting.


Body: Polycarbonate, black (RAL 9011)

Diffuser: Polycarbonate, opal

Weight: 1.24 kg




TE_LARA_F_300_BLANK_BL_persp.jpg

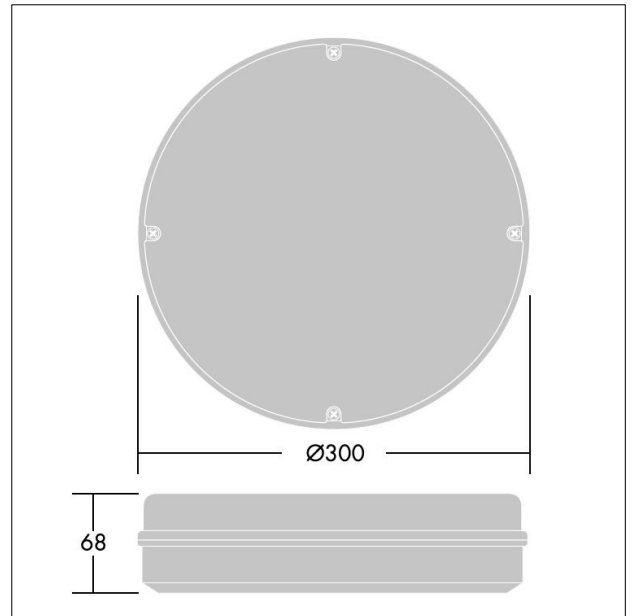

TE_LARA_M_1200L.wmf

Light Distribution

Emergency

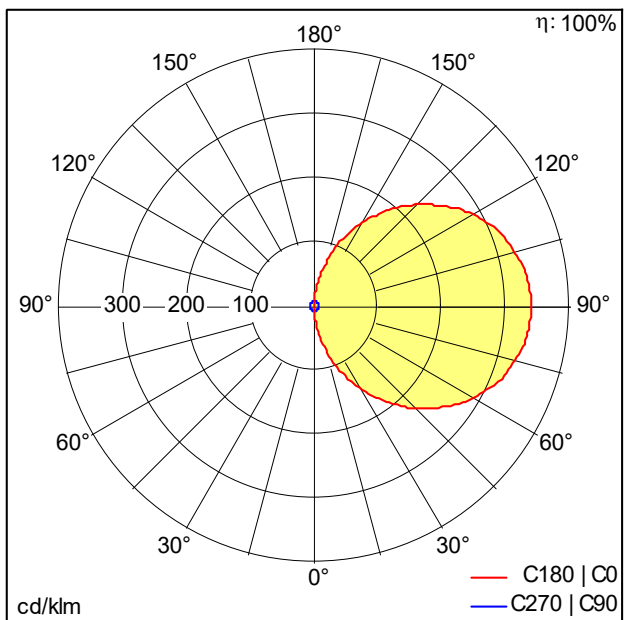

TE_LARA_LED_300_1200_840_MWS_BLK_E3e.idt

- Light Source: LED
- Luminaire luminous flux*: 165 lm
- Luminaire efficacy*: 82 lm/W
- Colour Rendering Index min.: 80
- Chromaticity tolerance (initial MacAdam): 4
- Rated median useful life*:
L70 50000 h at 25 °C
- Ballast: 1x LED_Con
- Luminaire input power*: 2 W
- Dimming: Fixed output
- Maintenance category CIE 97: E - Dust-proof IP5X

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.